
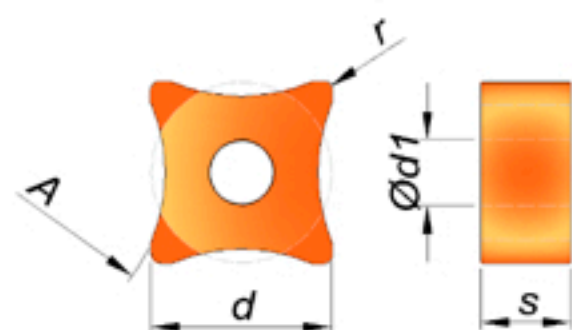


Escarfagem Externa de cordão de solda Insertos Quadrados - Negativa

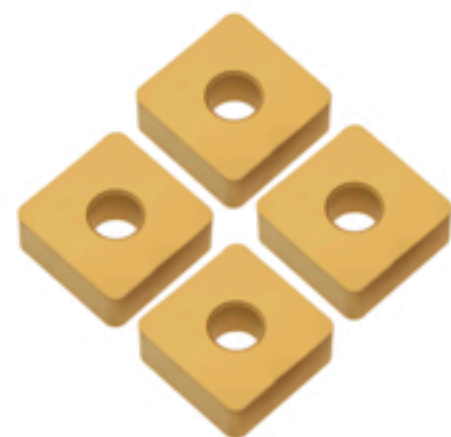

Especificação	d	s	r	d ₁	A	Diâmetro Mín.	Diâmetro Máx.
	mm	mm	mm	mm	mm	mm	mm
SNMA-250924-R00	25,40	9,52	2,4	9,12	0	sem raio - uso em tubos Ø grande	
SNMA-250924-R20	25,40	9,52	2,4	9,12	20	35,00	41,28
SNMA-250924-R25	25,40	9,52	2,4	9,12	25	35,00	41,28
SNMA-250924-R30	25,40	9,52	2,4	9,12	30	42,00	55,20
SNMA-250924-R35	25,40	9,52	2,4	9,12	35	49,00	64,40
SNMA-250924-R40	25,40	9,52	2,4	9,12	40	56,00	73,60
SNMA-250924-R50	25,40	9,52	2,4	9,12	50	75,00	92,08
SNMA-250924-R60	25,40	9,52	2,4	9,12	60	92,08	117,48
SNMA-250924-R70	25,40	9,52	2,4	9,12	70	105,0	128,80
SNMA-250924-R80	25,40	9,52	2,4	9,12	80	120,0	147,20
SNMA-250924-R100	25,40	9,52	2,4	9,12	100	150,0	190,00
SNMA-250924-R150	25,40	9,52	2,4	9,12	150	225,0	285,00
SNMA-250924-R200	25,40	9,52	2,4	9,12	200	300,0	380,00