


## Escarfagem Interna de cordão de solda - Anéis de Remoção SR Padrão Americano

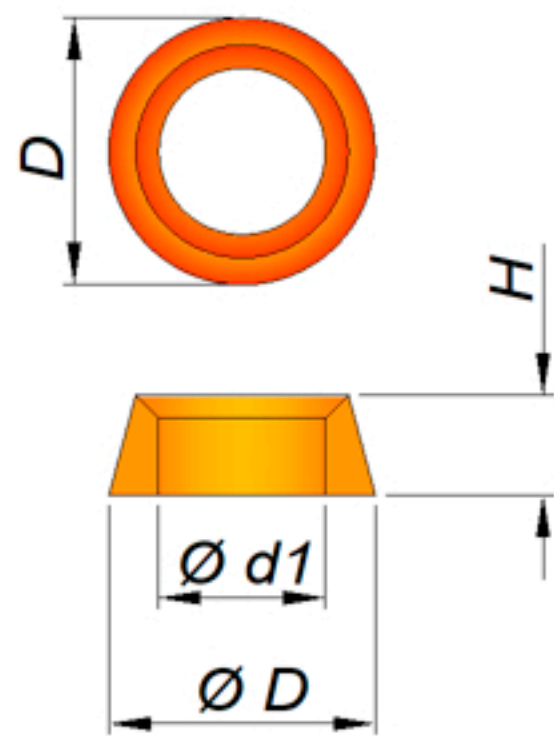

Especificação	ØD	Ød1	H	Mínimo ID*	Máximo ID*
	mm	mm	mm	mm	mm
N-15722	10,16	6,35	3,96	13,72	16,26
N-15723	11,13	7,49	3,96	15,88	22,23
N-15725	13,46	9,14	4,78	20,32	36,83
N-15727	17,15	11,10	6,35	25,40	49,78
N-15728	21,59	14,27	7,92	31,75	59,44
N-15729	25,40	15,88	9,53	40,64	66,68
N-15730	31,75	22,23	9,53	59,44	88,90
N-15731	38,10	25,40	9,53	76,20	114,30
N-15732	44,45	31,75	9,53	95,25	133,35
N-15733	50,80	34,54	9,53	114,30	152,40
N-15734	57,15	41,28	9,53	133,35	171,45